

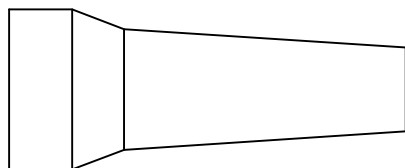
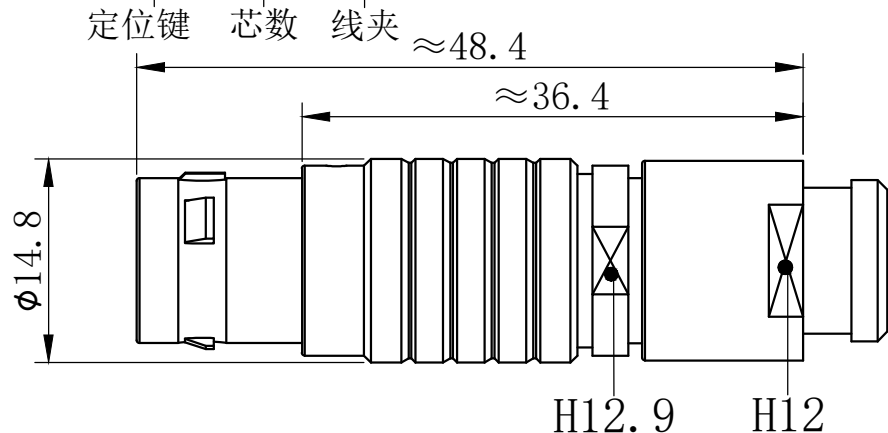


产品尺寸:


型号:02.FGG.2B.1G00.CA10ZN.20

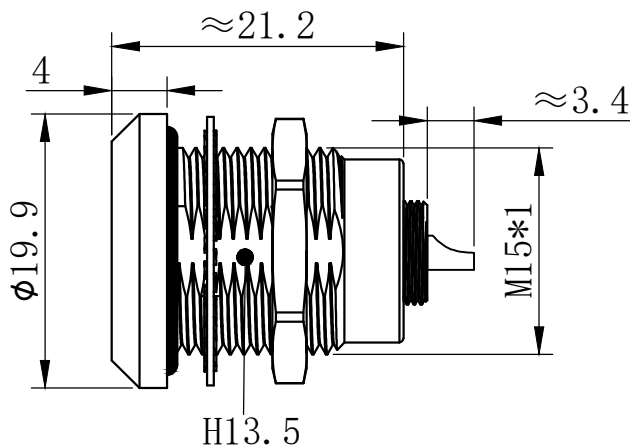


型号:HGG.2B.1G00.CL.20

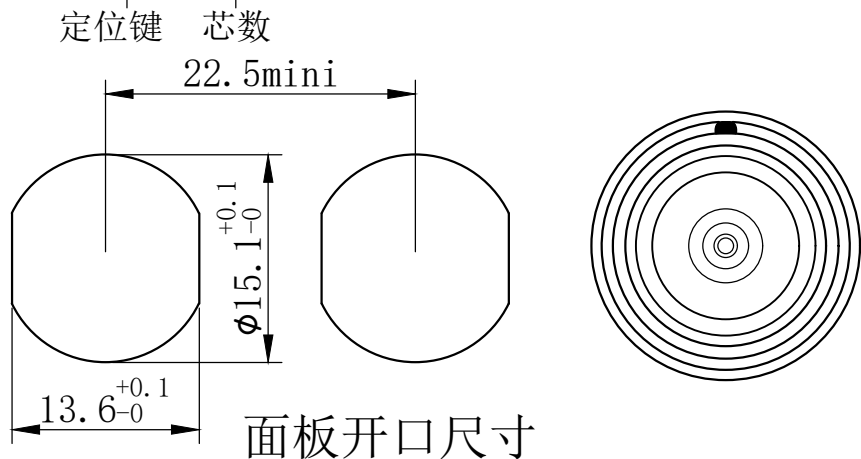

焊接端视图:



公针芯焊接端
焊接排序图



母针芯焊接端
焊接排序图

- 外壳材料:铜合金镀珍珠铬
- 绝缘材料:PPS
- 护套:黑色TPU
- 针芯材料:铜合金镀金
- 插拔次数:>5000次
- 防护等级:(插合时) IP50
- 工作温度:-40℃~+150℃
- 震动:10~2000HZ, 15g
- 冲击:100g, 6ms
- 耐盐雾:144h
- 绝缘电阻:>5000MΩ
- 接触电阻:5mΩ
- 额定电流:25A
- 测试电压:5KV (DC)
- 泄漏率 (He) :<10⁻⁷mbar. 1. s⁻¹
- IEC60512-7试验14b
- 针芯数量:1Pin
- 针芯规格: $\phi 2.0$
- 插头适配线径:4.0-10.0